

Top Marine

Floating Marina Installations



HD Concrete Pontoon



Heavy Duty Concrete Pontoon



CHAIN ANCHORING SYSTEM

- The strong and robust anchoring shafts are connected to reinforced concrete forming a strong and stable fixing system for the pontoon;
- Simple and user friendly chain locker plate.

HD RUBBER CONNECTING SET 400KN

- Silent flexible rubber bolted joints. Bolt M48, property class 8.8 bolts with lock nuts.

HD CONCRETE PONTOON

- Hydrotechnical fiber reinforced concrete C40/ 50, watertight W6, environment class XS2, frost resistance XF4 and KK4 according to EN 206-1;
- Reinforcement 6mm fully hot dip galvanized C4 according to ISO 1461 standard;
- Expanded polystyrene: density 19kg/m³, strength ≥100kPa, water absorption ≤3%.

SAFETY EQUIPMENT

- SOS Pedestal;
- Safety Ladder.

SERVICE PEDESTAL

- Electricity and water supply for boats;
- Lighting for the floating pontoon.

GANGWAY

- Metal gangway up to 12m;
- Timber gangway up to 6m.

PILE ANCHORING SYSTEM 40KN

- An alternative solution for chain mooring;
- Has been designed for piles Ø400-500 mm.

TIMBER DECKING

- Impregnated softwood decking 28x120mm.

BOAT BOOM

- Boat Booms with rubber or hinge connection;
- With or without timber decking.

TIMBER FENDER

- Planed timber fender 145× 145mm or 95× 95mm or 70x195mm;

MOORING FINGER

- Mooring Fingers with rubber connection.

FINGER CONNECTING RAIL

- Insures flexible and strong connection between concrete pontoon and mooring fingers;
- Finger position are horizontally adjustable.


MOORING BOLLARD

- The in-moulded T-bollard geometrical construction ensures better distribution of the internal forces.


SERVICE DUCTS

- Inside concrete, not visible;
- Can be installed on both sides or in the middle;
- Duct diameter 110 mm or 160 mm.


END CONNECTION

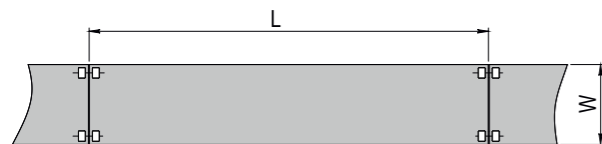


SIDE CONNECTION

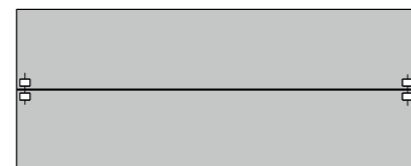

L-CONNECTION

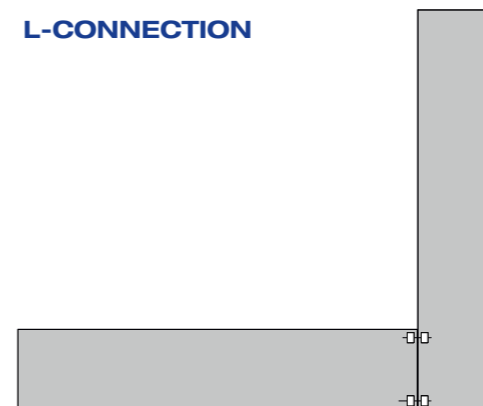

T-CONNECTION

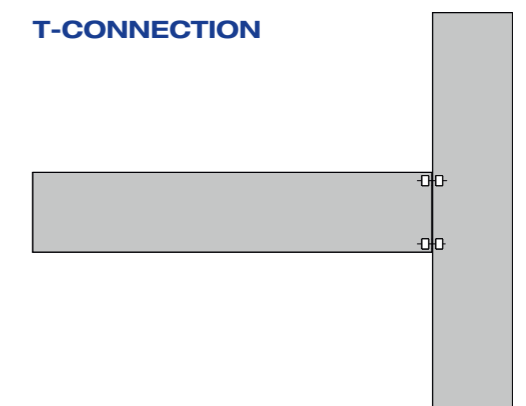

Heavy Duty Concrete Pontoon

HD Pontoon	High-stability, strong, maintenance free, for year-round use, long service life.
Intended use	As landing stages, breakwaters, for floating houses and for other marina structures.
Connection options	End connection, side connection, L- connection, T-connection.
Structural design	Hydrotechnical fiber reinforced concrete with EPS inside, heavy-duty rubber joints.
Anchoring system	Anchoring by chain or elastic rope. Anchoring by piles.
Accessories	Wood or plastic decking, fenders, finger connection rails, mooring fingers, boat booms, mooring bollards, service ducts, safety equipment.

Technical Data of Heavy Duty Concrete Pontoon

Item code		04 10 00	04 12 00	04 14 00	04 20 00	04 22 00	04 24 00	04 30 00	04 32 00	04 34 00
Dimensions (m)	Length	9.0	9.0	9.0	12.0	12.0	12.0	15.0	15.0	15.0
	Concrete width	2.4	3.16	4.16	2.4	3.16	4.16	2.40	3.16	4.16
	Width with fenders	2.7	3.5	4.5	2.7	3.5	4.5	2.7	3.5	4.5
	Height	1.07	1.07	1.07	1.07	1.07	1.07	1.07	1.07	1.07
Freeboard (m)		0.49	0.54	0.58	0.54	0.58	0.62	0.56	0.61	0.64
Designed load capacities (kN/m²)		4.7	5.1	5.4	5.1	5.5	5.9	5.4	5.8	6.1
Designed load capacities (tons)		10,1	14,6	20,4	15,0	21,3	29,7	19,7	27,9	38,8
Weight (t)		11.9	14.3	17.4	14.9	17.9	21.8	17.9	21.4	26.1
Allowed max. wave height		0.5 m								
Allowed current speed		1 m/sec								
Allowed ice condition		Allowed static ice load, ice moving is not allowed								
Anchoring systems	Chain	Ø20 mm								
	Concrete anchors	2000 kg								
	Pile	Ø400-600 mm, 40kN								
Boat mooring		Mooring buoys, Boat Booms, Mooring fingers, Mooring bollards								
Boat sizes		Boat size up to 15.2 m (50 feet)								

Revision date 01.01.2018

Top Marine is a continuously developing firm and may at its sole discretion revise or amend this product catalogue without further notice.



OÜ Top Marine
Ph +372 5304 4000

Tule 33, Saue 76505 ESTONIA
info@topmarine.ee
www.topmarine.eu

Representative: