










Timber Pontoon with Concrete Floats





Timber Pontoon with Concrete Floats

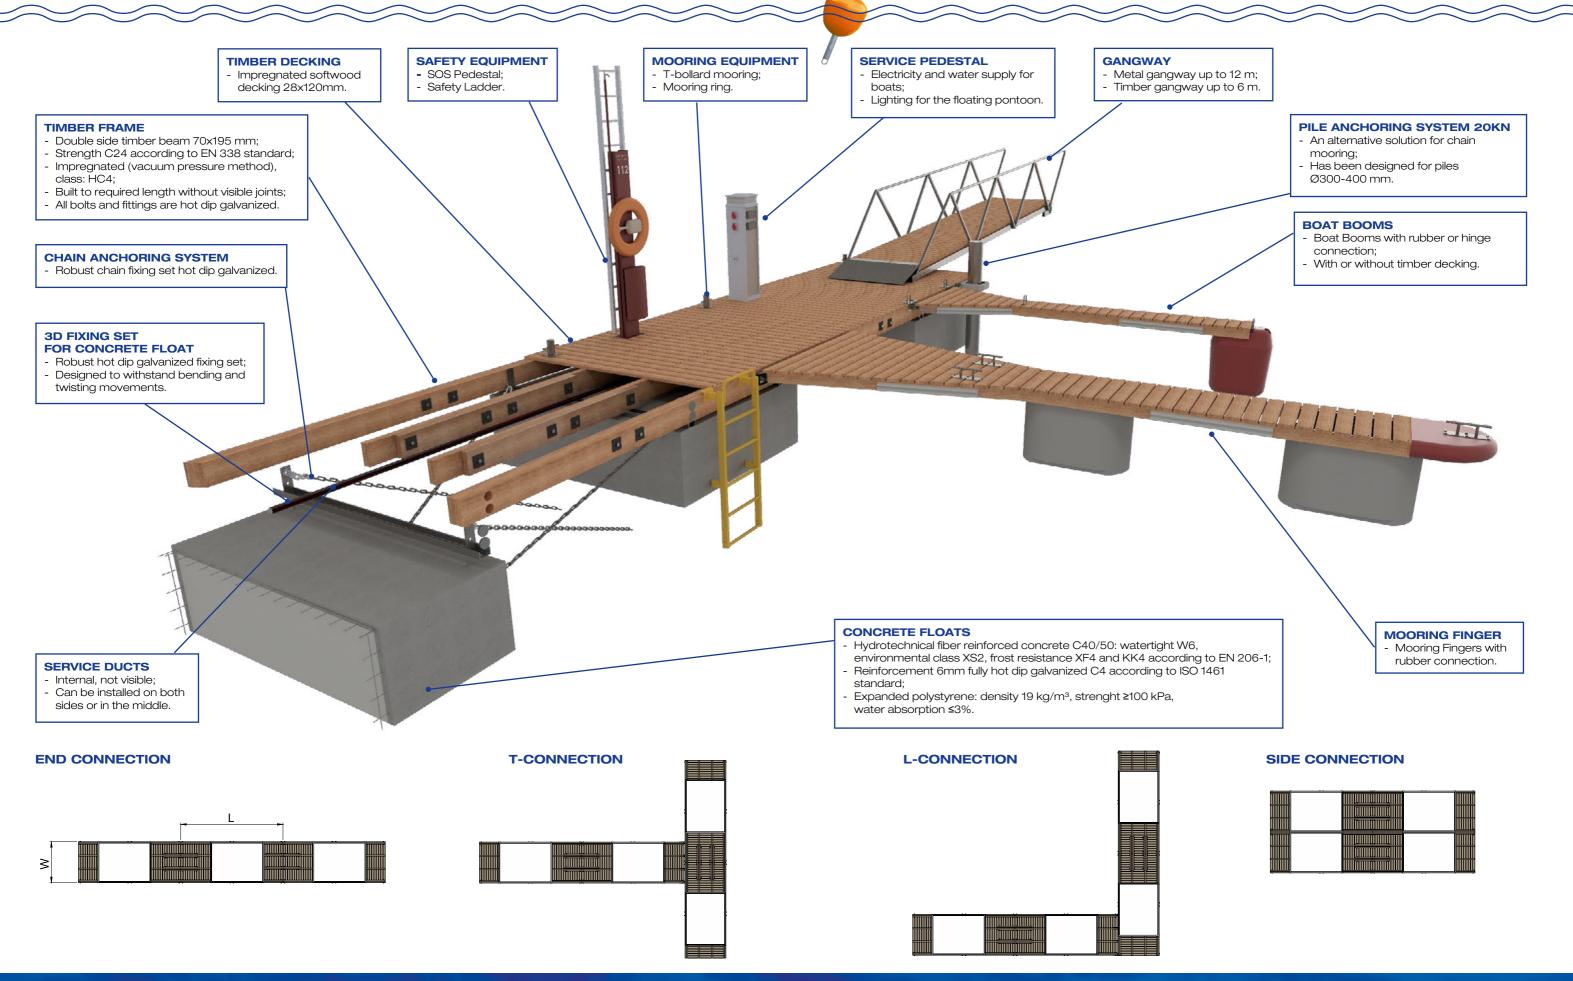

Timber Pontoon with Concrete Floats

Timber Pontoon	Good stability, suitable for year-round use		
Intended use	As landing stages and for floating platforms		
Connection options	End connection, side connection, L-connection, T-connection		
Structural design	Hydrotechnical fiber reinforced concrete with EPS inside floats, impregnated softwood timber decking, built to required length without visible joints		
Anchoring system	Anchoring by chain or elastic rope. Anchoring by piles		
Accessories	Mooring rings, mooring bollards, mooring fingers, boat booms, fenders, service ducts, safety equipment, swimming ladders		

Technical Data of the Timber Pontoon with Concrete Floats

Technical data of pontoon					
Item code		03 32 00	03 34 00	03 64 00	
Dimensions of pontoons (m)	Width	2.4	3.2	3.2	
	Length	12.0			
	Height	0.98			
Number of floats (pc)		2	2	3	
Freeboard (m)		0.66	0.65	0.67	
Weight of the pontoon (tons)		4.9	5.0	7.1	
Designed load capacities (kN/m ²)		2.0	1.5	2.3	
Allowed max wave height		0.3 m			
Allowed current speed		1 m/sec			
Allowed ice condition		Allowed static ice load, ice moving is not allowed			
Anchoring systems	Chain	Ø16 mm			
	Concrete anchors	1000 kg			
	Pile	Ø300-400 mm, 20 kN			
Boat mooring		Mooring buoys, Boat booms, Mooring fingers, Mooring rings, Mooring bollards			
Boat sizes		Boat size up to 12.2m (40 feet)			

Technical data of concrete float				
Item code	03 70 00			
	Width	2.38		
Dimensions of concrete floats (m)	Length	3.12		
	Height	0.716		
Weight of float (kg)	2089			
Designed load capacities	3228			
Designed load capacities	31.7			
	Rev	ision date 01.01.2018		

Top Marine is a continuously developing firm and may at its sole discretion revise or amend this product catalogue without further notice.



OÜ Top Marine Ph +372 5304 4000 Tule 33, Saue 76505 ESTONIA info@topmarine.ee www.topmarine.eu Representative: