

Top Marine

Floating Marina Installations



Accessories



Accessories

MOORING RINGS


- Fully hot dip galvanized robust construction.



Item code	14 11 00	14 21 00	14 50 00	14 52 00
Dimensions	Ø12x265 mm	Ø16x265 mm	Ø12 mm	Ø20 mm
Strength	10 kN	15 kN	10 kN	20 kN
Material	Hot dip galvanized			
Intended use	Swimming pontoon	Boat pontoon	Swimming pontoon	Timber pontoon with concrete floats. All concrete pontoon

MOORING BOLLARDS

- T-Bollard mooring;
- The geometrical construction of the bollard ensures the better distribution of the internal forces;
- Available as fully hot dip galvanized or stainless steel.

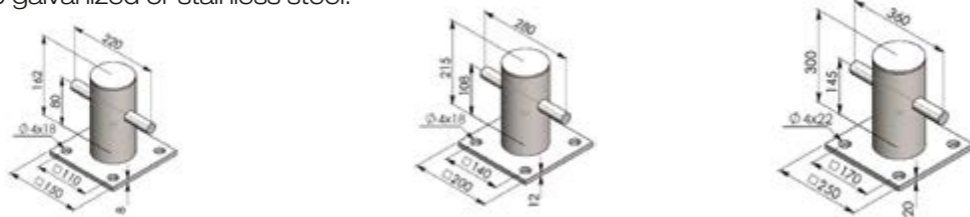


Item code	14 64 00	14 62 00	14 65 00	14 63 00	14 66 00	14 67 00
Product	T-bollard 25 kN		T-bollard 50 kN		T-bollard 100 kN	
Material	Hot dip galvanized	Stainless steel	Hot dip galvanized	Stainless steel	Hot dip galvanized	Stainless steel
Dimensions	Ø76 mm		Ø114 mm		Ø140 mm	
Strength	25 kN		50 kN		100 kN	
Intended use	Timber pontoon with concrete floats. All concrete pontoon		All concrete pontoon		All concrete pontoon	

VENDER BACELL

- Highly shock absorbent;
- Strong and elastic material with 100 % watertight cells;
- Foam material, that has been in use for over 30 years in the professional market;
- Does not deteriorate in the sun;
- Does not stain boats.

VENDER BACELL TECHNICAL INFORMATION

- Hardness surface, shore A: 37;
- Hardness foam core, shore A: 24;
- Compression strength: 140 kPa;
- Recommended min temp: -25 °C;
- Recommended max temp: +40 °C;
- Temp. not to be exceeded: +50 °C;
- Density: 95 g/l.

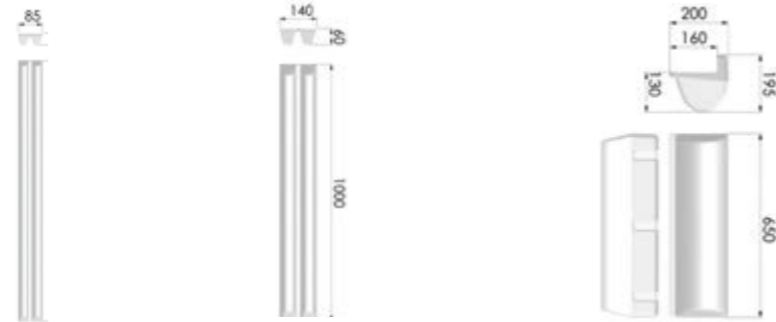


Item code	16 71 00	16 74 00	16 72 00	16 75 00	16 76 00
Product	Fender MF44		Fender MF60		Fender MBF150
Colour	White	Grey	White	Grey	Grey
Dimensions	Length	940 mm		1000 mm	650 mm
	Width	44 mm		60 mm	195 mm
	Height	85 mm		140 mm	200 mm
Weight	220 g		510 g		1400 g
Fittings	4x clips, screws not included		4x clips, screws not included		3x aluminium brackets, pre-assembled, screws not included
Intended use	Swimming pontoons, Boat booms, Mooring fingers.		Boat pontoons, Timber pontoons with concrete floats, all concrete pontoons.		Timber pontoons with concrete floats, all concrete pontoons.

SWIM LADDERS

- Available as fully hot dip galvanized or stainless steel;
- Selection of 4 or 7 step swimming ladders;
- Can be installed on every pontoon provided by Top Marine OÜ;
- Recommended to remove for the winter;
- Available as foldable.

Item code	16 20 00	16 24 00	16 10 00	16 14 00
Product	Swimming ladder 4 steps		Swimming ladder 7 steps	
Material	Hot dip galvanized	Stainless steel	Hot dip galvanized	Stainless steel

Item code	16 22 00	16 25 00	16 12 00	16 15 00
Product	Swimming folding ladder 4 steps		Swimming folding ladder 7 steps	
Material	Hot dip galvanized	Stainless steel	Hot dip galvanized	Stainless steel

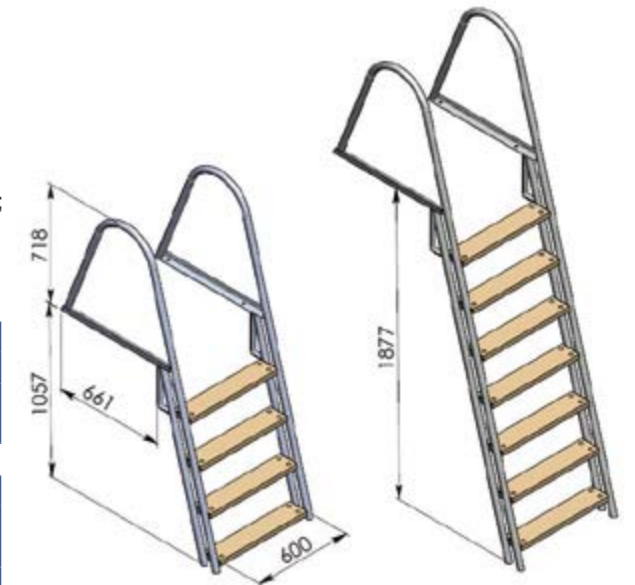

SERVICE PEDESTAL

- Electricity supply boats;
- Water supply for boats;
- Lighting for the floating pontoon;
- Constructed from two aluminium extruded sides and composite front and rear panels;
- From 16amp Sockets up to 250amp Three Phase Socket;
- Lockable Sockets;
- Smart card systems;
- Recommended to install at least after every 12 m to ensure the whole pontoon with lighting.


16 90 00 Service Pedestal



SAFETY LADDER

- Fully hot dip galvanized and powder coated yellow;
- Recommended to install at least after every 40 m;
- Recommended to remove for the winter.

16 35 00 Safety ladder

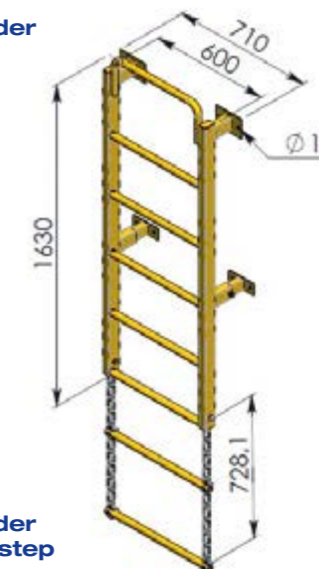


16 36 00 Safety ladder additional step

SOS PEDESTAL

- Perfect for safety, includes:
- Life buoy (4kg) with throw line (30m, floating, red);
- Hook (3m, floating, red);
- Ladder (3m, floating, aluminium);
- Information board;
- Fire extinguisher and cabinet as extra;
- Recommended to install at least after every 60m

16 30 00 SOS pedestal

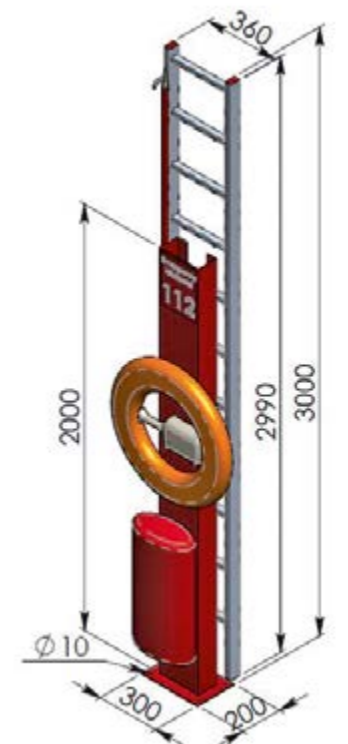

Accessories

PUMP OUT STATIONS

- Helps to get rid of bilge or waste water on a yacht;
- Robust station that will give many years of service.

16 60 20

Mobile Pump Out Trailer LSM80

- Small, mobile trolley ideal for use on floating pontoons
- Pump out to on board 80 litre tank and direct to sewer
- Bronze, self-priming diaphragm pump can be run dry
- Easy to service and maintain
- Pump capacity: 25 l/min
- Motor power 250 W
- Weight empty: 50 kg
- Suction height max: 5 m
- Discharge length: 15 m
- Pressure height max: 8m



16 60 00

Single Pump Out Station LS60W


- Housing made of 316 mirror finished stainless steel
- Diaphragm pump made in bronze
- Token, coin, key, Start/ Stop or magnetic card operated
- Pump capacity: 50 l/min
- Motor Power 750 W
- Weight: 95 kg
- Max discharge length: 120 m
- Max discharge height: 15m



10 90 00

Gate

- Available for different width gangways and pontoons;
- Can be installed on abutments, gangways and pontoons;
- Increases security;
- Smart card systems;
- Fully hot dip galvanized C4 according to ISO 1461 standard.

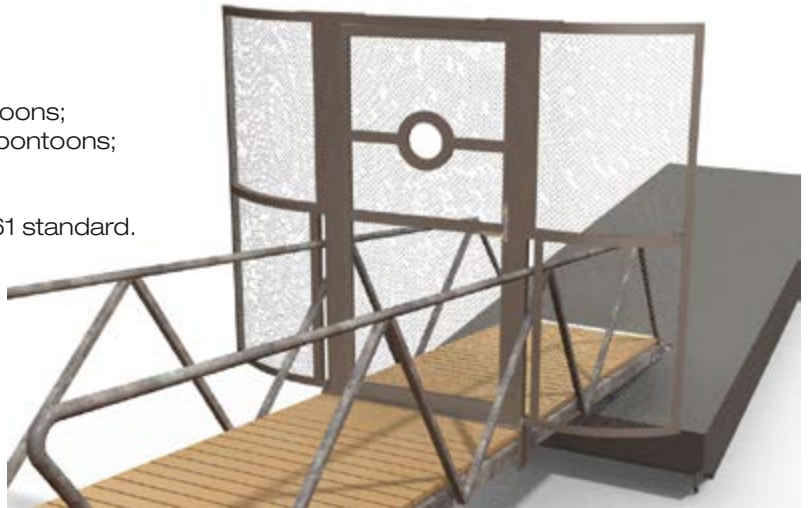

Revision date 01.01.2023

Top Marine is a continuously developing firm and may at its sole discretion revise or amend this product catalog without notice.

Download our product CAD details from the ProdLib library.



Top Marine
Ph +372 5304 4000

Tule 33, Saue 76505 ESTONIA
info@topmarine.ee
www.topmarine.eu

Representative: